

„Absolute“ Digital Caliper for Inside or Outside Grooves • IP54


DIN 862

- art.-no. 201082 – 201084 for inside groove measurement
- art.-no. 201096 – 201098 for outside groove measurement
- top model for industry purposes
- with glass rail for more accuracy
- spray water proof acc. to DIN 40050 / IEC 60529
- with data output, top model
(connectivity also for Digimatic measuring devices)


- sturdy quality, stainless steel, hardened
- large LCD display with clear reading, 9 mm digit height
- jaws finely ground and lapped, with fixing screw
- On/Off button, with „ORIGIN“ system, with thumbroll
- mm/inch switchable, zero setting at any position
- incl. 1x 3 V battery (type CR2032, art.-no.: 90112), with operation manual

Options



- data transfer via cable, art.-no.: 2420194, see page 334
- data transfer via WiFi, art.-no.: 2040101, see page 334
- data transfer via Bluetooth®, art.-no.: 2023106 + 209000, see page 334

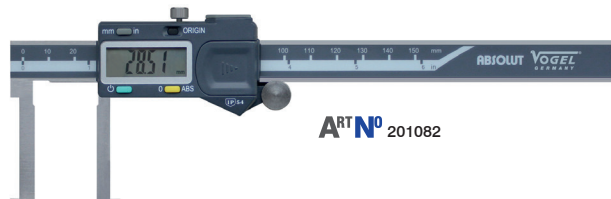


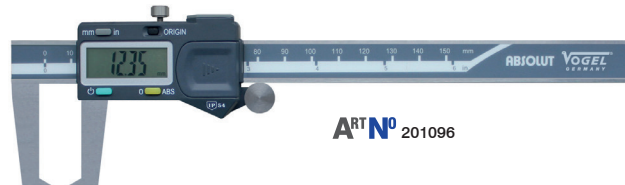


ART No 201082

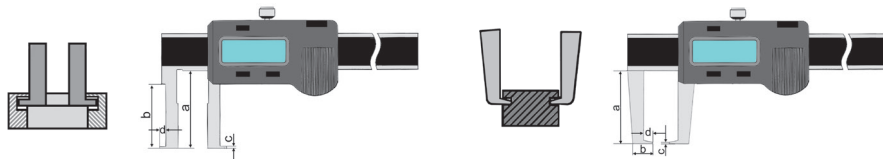

ART No 201096



ART No	type	 mm / inch	 mm / inch	 mm	 mm / inch	A mm	B mm	C mm	D mm
201082	inside	20 – 150 / 0 – 6	0.01 / 0.0005	0.01	0.03 / 0.0015	36	15	1	6
201083	inside	25 – 200 / 0 – 8	0.01 / 0.0005	0.01	0.03 / 0.0015	36	15	1	6
201084	inside	30 – 300 / 0 – 12	0.01 / 0.0005	0.01	0.04 / 0.002	56	15	1	6
201096	outside	0 – 150 / 0 – 6	0.01 / 0.0005	0.01	0.03 / 0.0015	40	15	1	5
201097	outside	0 – 200 / 0 – 8	0.01 / 0.0005	0.01	0.03 / 0.0015	50	19.5	1.8	7
201098	outside	0 – 300 / 0 – 12	0.01 / 0.0005	0.01	0.04 / 0.002	60	21	1.8	8