


- water and coolant proof acc. to DIN 40050 / IEC 60529
- with mini USB data output
- mechanical parts in stainless steel, hardened
- housing made of aluminium, front plate made of plastic
- LCD display with clear reading, digit height 11mm
- On/Off button, ABS/INC measurement system
- zero setting at any position, \pm pre-select value, PRESET
- mm/inch switchable
- incl. 1x 3 V battery (type CR2032, art.-no.: 2002093), with operation manual

Options


- spare rubber sleeve (art.-no.: 249915)
- data transfer via cable for art.-nr.: 242140, art.-no.: 2420192, see page 304




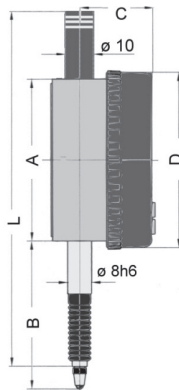




ART N° 242140



ART N° 242150



ART N°	 mm / inch	 mm / inch	 mm	 mm ¹⁾ 1 Digit	A mm	B mm	C mm	D mm	L mm	 KG	 ART N° CC
242140	12.5 / 0.5	0.01 / 0.0005	0.02	¹⁾ 0.010	59	65	30	59.5	145	0.095	2494200
242150	12.5 / 0.5	0.001 / 0.00005	0.004	0.003	59	65	30	59.5	145	0.095	2494200